

Featuring new products in the Architecture & Design Collection

CRT-50-SS Series

CC-400 & TYPE CC Series *featuring*:



Toll-Free Telephone: 1-866-999-1KNC (1562)

Website: www.kncrowder.com





A GLIMPSE AT KNC'S FUTURE PRODUCT DEVELOPMENTS

The below items are a sneak peek of new product lines to be developed and released by KNC in the coming months.

Economical CFT-150 Flat Track Series

The popular CFT-200 series will be scaled down to provide an economical and lighter duty version for our customers and their applications.



Type CC-HD Series Catch'N'Close Crowderframe Pocket Door Kits

The next release of Catch'N'Close Crowderframe Pocket Door Kits will be designed for heavy duty doors up to 300lbs each and for use in 2X6 Wall Construction.

CF (Bi-folding) Series Make-over

The entire Bi-folding series product line will be getting a make-over that will make installation easier for our customers as well as achieving smaller gaps at the top and bottom of the doors.

Heavy-Duty CST-800 Stacking Track System

Our widely used CST-700 Stacking Track system will be getting a heavy upgrade to provide a stronger and more durable system for those heavy stacking door application.

This is just the start as KNC has many more new products in the pipeline. If you have any questions or comments about the future product developments above, please contact us at customerservice@kncrowder.com or 1-866-999-1KNC (1562)



Thank you for continuing to support K.N. Crowder products.

EXPOSED BARN DOOR SYSTEM TOP MOUNT HANGER




CRT-51-SS

Top Mount Hanger

Key Product Features:

- 2 3/4 in [69.9 mm] diameter, Delrin Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Material: 303 Stainless Steel polished to a Satin finish
- CRT-51-SS Hanger Load Capacity 175 lbs. (two Hangers)



HOW TO SPECIFY/ORDER CRT-51-SS FOR ONE DOOR OPENING



KIT CODE:

CRT-51-SS X [track length] 1DR KIT



Above kit includes:

- 1 CRT-50-SS Track X [track length] (typically two x door width, example: 36 in wide door requires a 72 in long track)
- [] CRT-11-WB-SS Wall Mount Bracket Sets (quantity is based on track length)
- 2 CRT-51-SS Top Mount Hangers
- 2 CRT-50-SS Shock Absorbing Stops
- 1 C-914 Guide Channel x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913 Floor Guide











(2 Door Kits are also available)

(For baseboard applications, please visit our website or contact customer service for more information)

CRT-51-SS KIT DETAILS (CRT-51-SS HANGER FOR 1 3/4 in [44.5 mm] THICK DOORS, C-914/C-913 GUIDE SYSTEM) (FOR DETAILS ON 1 3/8 in [34.9 mm] THICK DOORS, PLEASE VISIT WEBSITE)

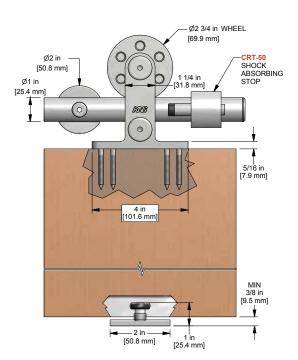

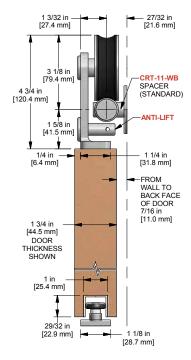

EXPOSED BARN DOOR SYSTEM STRAP MOUNT HANGER



CRT-52-SS

Strap Mount Hanger

Key Product Features:

- 2 3/4 in [69.9 mm] diameter, Delrin Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Material: 303 Stainless Steel polished to a Satin finish
- CRT-52-SS Hanger Load Capacity 175 lbs. (two Hangers)





HOW TO SPECIFY/ORDER CRT-52-SS FOR ONE DOOR OPENING



KIT CODE:

CRT-52-SS X [track length] 1DR KIT

Above kit includes:

1 - CRT-50-SS Track X [track length] (typically two x door width, example: 36 in wide door requires a 72 in long track)

[] - CRT-22-WB-SS Wall Mount Bracket Sets (quantity is based on track length)

2 - CRT-52-SS Strap Mount Hangers

2 - CRT-50-SS Shock Absorbing Stops

1 - C-914 Guide Channel x [door width]

(example: 36 in wide door requires a 36 in long guide channel)

1 - C-913 Floor Guide

(2 Door Kits are also available)

(For baseboard applications, please visit our website or contact customer service for more information)



For 1 3/8 in [34.9 mm] Thick Doors, Please specify kit code:

CRT-52-38-SS X [track length] 1DR KIT

Above kit includes:

1 - CRT-50-SS Track X [track length]

[] - CRT-22-WB-SS Wall Mount Bracket Sets

2 - CRT-52-38-SS Strap Mount Hangers


(For 1 3/8 in [34.9 mm] thick doors only)


2 - CRT-50-SS Shock Absorbing Stops

1 - C-914 Guide Channel x [door width]

1 - C-913 Floor Guide

CRT-52-SS KIT DETAILS (CRT-52-SS HANGER FOR 1 3/4 in [44.5 mm] THICK DOORS, C-914/C-913 GUIDE SYSTEM) (FOR DETAILS ON 1 3/8 in [34.9 mm] THICK DOORS, PLEASE VISIT WEBSITE)

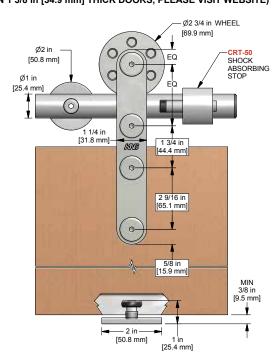



(POSED BARN DOOR SYSTEM STRAP MOUNT HANGER




CRT-53-12-SS

Glass Strap Mount Hanger

Key Product Features:

- 2 3/4 in [69.9 mm] diameter, Delrin Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Material: 303 Stainless Steel polished to a Satin finish
- CRT-53-12-SS Hanger Load Capacity 175 lbs. (two Hangers)







HOW TO SPECIFY/ORDER CRT-53-12-SS FOR ONE DOOR OPENING



KIT CODE:

CRT-53-12-SS X [track length] 1DR KIT

Above kit includes:

1 - CRT-50-SS Track X [track length] (typically two x door width, example: 36 in wide door requires a 72 in long track) [] - CRT-11-WB-SS Wall Mount Bracket Sets

(quantity is based on track length)

2 - CRT-53-12-SS Glass Strap Mount Hangers

(for 1/2 in [12 mm] thick glass only)

2 - CRT-50-SS Shock Absorbing Stops

1 - CGGS-012 Stationary Glass Floor Guide

(2 Door Kits are also available)

(For baseboard applications, please visit our website or contact customer service for more information)




For 3/8 in [10 mm] Thick Glass, Please specify kit code:


CRT-53-38-SS X [track length] 1DR KIT

Above kit includes:

- 1 CRT-50-SS Track X [track length]
- [] CRT-11-WB-SS Wall Mount Bracket Sets
- 2 CRT-53-38-SS Strap Mount Hangers (For 3/8 in [10 mm] thick glass only)
- 2 CRT-50-SS Shock Absorbing Stops
- 1 CGGS-038 Stationary Glass Floor Guide

CRT-53-12-SS KIT DETAILS (CRT-53-12-SS HANGER FOR 1/2 in [12.0 mm] THICK DOORS, CGGS-012 GUIDE SYSTEM) (FOR DETAILS ON 3/8 in [10 mm] THICK GLASS, PLEASE VISIT WEBSITE)

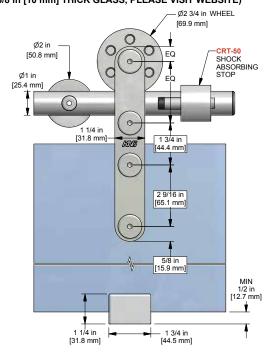



CATCH'N'CLOSE"

Closes safely and silently

Crowdertrack's revolutionary technology allows sliding doors to close and stay closed -- safely, securely and silently, all with the introduction of the Catch'N'Close™ closing system --

Bouncing and slamming is no longer an issue for Crowdertrack's sliding doors as the Catch'N'Close technology allows for smooth and controlled opening and closing of the door. The door will automatically slow and shut itself for the final few inches as the door travels to the open/closed position. No more jamming fingers or slamming doors.

"Safety is a top concern at Crowder. The Catch'N'Close closing system allows the door to safely and securely close," said Jeremy Crowder, Vice President K.N. Crowder.

THE BENEFITS:

Silent close

If noise reduction and privacy is a priority, the Catch'N'Close closing system is ideal. Long-term care facilities, hotels, hospitals, offices, conference rooms, bedrooms and bathrooms are just a few spaces that can benefit from this new technology.

Safety

The Catch'N'Close closing system eliminates accidental closure of the door on users' fingers. Residential and commercial facilities who are catering to small children, the elderly, or individuals who require additional care are perfect candidates for the system.

Ease of use

The Catch'N'Close closing system is extremely user friendly as the door gently glides into the open/closed position without user assistance. The user is no longer responsible for ensuring that the door is either in the fully open or closed position as the Catch'N'Close mechanism does it for them.

The Technology

K.N. Crowder is the first to use the gas spring technology to create a top of the line door closing system. The closing system can be installed on both the opening and closing ends of doors up to 300 lbs. or as narrow as 18 inches wide. It has been cycle tested for up to 50,000 cycles without fail.

The Catch'N'Close closing system has the unique ability to safeguard the door and hardware from wear and tear. The system eliminates slamming; protecting the user, the door and the door frame.

Installation

The installation is easy as the Catch'N'Close closing system is hidden inside the Crowdertrack and requires no additional installation efforts. The product can be used on top/side mounted doors, pocket doors, single and bi-parting doors and some barn door applications. In the event there is any issue, or customers want to replace the closing device with a new one, there is no need to take apart the door or wall as the new closing system can easily be accessed or installed/removed from underneath the track.

"Our customers have always wanted quality, highly functional products that look great! The Catch'N'Close closing system fits nicely into our collection of quality sliding door hardware", said Jeremy Crowder, Vice President K.N. Crowder.



TOP MOUNT DOOR SYSTEM ZERO CLEARANCE CATCH'N'CLOSE HANGER



CC-410-W

Zero Clearance Catch'N'Close Hanger

Key Product Features:

- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Allows for a minimal clearance of 3/16 in [4.8 mm] between the top edge of the door and the underside of the track
- CC-410 Hanger Load Capacity 150 lbs. (two Hangers)
- CC-404 Extruded Aluminum Top Mount Track, 6061-T5 Alloy
- Includes:





HOW TO SPECIFY/ORDER CC-410-W FOR ONE DOOR OPENING



KIT CODE:


CC-1-410-W X [track length] 1DR KIT

Above kit includes:

- 1 CC-404 Top Mount Track X [track length] (typically two x door width, example: 36 in wide door requires a 72 in long track)
- 2 CC-410 Zero Clearance Catch'N'Close Hangers
- 2 CC-1 Catch'N'Close Closing Devices (for doors weighing up to 150lbs)
- 2 CC-100 Catch'N'Close In-Track Stops
- 1 C-914 Guide Channel x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913 Floor Guide

(For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as CC-75-410-W X [track length] 1DR KIT)

CC-410-W KIT DETAILS (CC-410 HANGER, CC-404 TRACK, C-914/C-913 GUIDE SYSTEM)

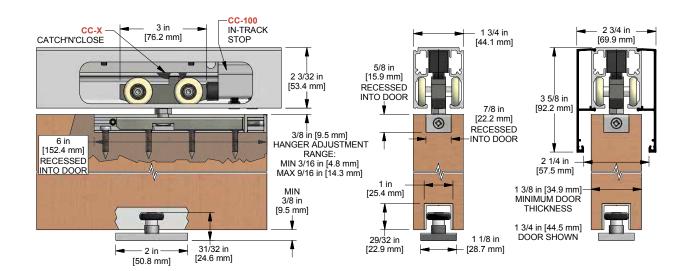

TOP MOUNT DOOR SYSTEM EASY CONNECT CATCH'N'CLOSE HANGER




CC-493-W

Easy Connect Catch'N'Close Hanger

Key Product Features:

- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Easy installation with the quick disconnect hanger stud
- CC-493 Hanger Load Capacity 150 lbs. (two Hangers)
- CC-404 Extruded Aluminum Top Mount Track, 6061-T5 Alloy
- Includes:





HOW TO SPECIFY/ORDER CC-493-W FOR ONE DOOR OPENING



KIT CODE:


CC-1-493-W X [track length] 1DR KIT

Above kit includes:

- 1 CC-404 Top Mount Track X [track length] (typically two x door width, example: 36 in wide door requires a 72 in long track)
- 2 CC-493 Easy Connect Catch'N'Close Hangers
- 2 CC-1 Catch'N'Close Closing Devices (for doors weighing up to 150lbs)
- 2 CC-100 Catch'N'Close In-Track Stops
- 1 C-914 Guide Channel x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913 Floor Guide

(For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as CC-75-493-W X [track length] 1DR KIT)

CC-493-W KIT DETAILS (CC-493 HANGER, CC-404 TRACK, C-914/C-913 GUIDE SYSTEM)

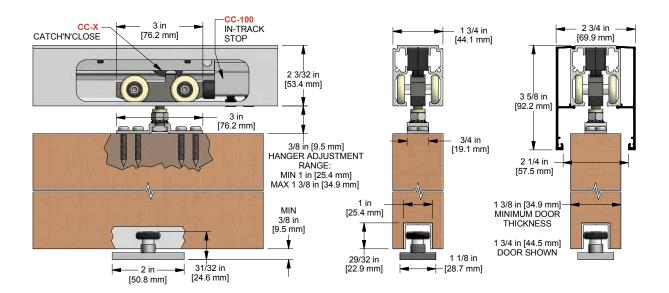

SIDE MOUNT DOOR SYSTEM ZERO CLEARANCE CATCH'N'CLOSE HANGER




CCS-410-W

Zero Clearance Catch'N'Close Hanger


Key Product Features:

- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Allows for a minimal clearance of 3/16 in [4.8 mm] between the top edge of the door and the underside of the track
- CC-410 Hanger Load Capacity 150 lbs. (two Hangers)
- CC-408 Extruded Aluminum Side Mount Track, 6061-T5 Alloy
- Includes:





HOW TO SPECIFY/ORDER CCS-410-W FOR ONE DOOR OPENING



KIT CODE:

CCS-1-410-W X [track length] 1DR KIT

Above kit includes:

1 - CC-408 Side Mount Track X [track length]


(typically two x door width, example: 36 in wide door requires a 72 in long track)

- 2 CC-410 Zero Clearance Catch'N'Close Hangers
- 2 CC-1 Catch'N'Close Closing Devices
- 2 CC-100 Catch'N'Close In-Track Stops
- 1 C-914 Guide Channel x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913 Floor Guide

(For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as CCS-75-410-W X [track length] 1DR KIT)

CCS-410-W KIT DETAILS (CC-410 HANGER, CC-408 TRACK, C-914/C-913 GUIDE SYSTEM)

[★INDICATES MOUNTING FLANGE ON CC-408 TRACK]

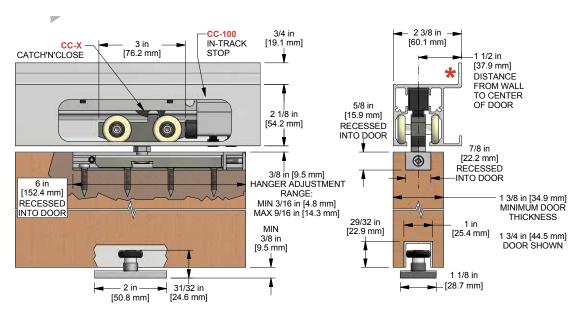

SIDE MOUNT DOOR SYSTEM EASY CONNECT CATCH'N'CLOSE HANGER




CCS-493-W

Easy Connect Catch'N'Close Hanger

Key Product Features:

- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Easy installation with the quick disconnect hanger stud
- CC-493 Hanger Load Capacity 150 lbs. (two Hangers)
- CC-408 Extruded Aluminum Side Mount Track, 6061-T5 Alloy
- Includes:





HOW TO SPECIFY/ORDER CCS-493-W FOR ONE DOOR OPENING



KIT CODE:

CCS-1-493-W X [track length] 1DR KIT

Above kit includes:

1 - CC-408 Side Mount Track X [track length]


(typically two x door width, example: 36 in wide door requires a 72 in long track)

- 2 CC-493 Easy Connect Catch'N'Close Hangers
- 2 CC-1 Catch'N'Close Closing Devices (for doors weighing up to 150lbs)
- 2 CC-100 Catch'N'Close In-Track Stops
- 1 C-914 Guide Channel x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913 Floor Guide

(For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as CCS-75-493-W X [track length] 1DR KIT)

CCS-493-W KIT DETAILS (CC-493 HANGER, CC-408 TRACK, C-914/C-913 GUIDE SYSTEM)

[★INDICATES MOUNTING FLANGE ON CC-408 TRACK]

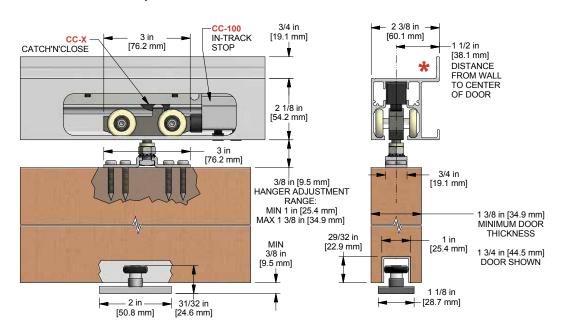

LOW PROFILE CONCEALED SIDE MOUNT DOOR SYSTEM ZERO CLEARANCE CATCH'N'CLOSE HANGER




CCL-410-W

Zero Clearance Catch'N'Close Hanger


Key Product Features:

- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Allows for a minimal clearance of 3/16 in [4.8 mm] between the top edge of the door and the underside of the track
- CC-410 Hanger Load Capacity 150 lbs. (two Hangers)
- CC-408 Extruded Aluminum Side Mount Track, 6061-T5 Alloy
- Includes:





HOW TO SPECIFY/ORDER CCL-410-W FOR ONE DOOR OPENING



KIT CODE:

CCL-1-410-W X [track length] 1DR KIT

Above kit includes:

1 - CC-408 Side Mount Track C.A. X [track length]

(typically two x door width, example: 36 in wide door requires a 72 in long track)


- 1 CC-470 Low Profile Side Mount Fascia C.A. X [track length]
- 2 CC-471 End Caps C.A.
- 2 CC-410 Zero Clearance Catch'N'Close Hangers
- 2 CC-1 Catch'N'Close Closing Devices
- 2 CC-100 Catch'N'Close In-Track Stops
- 1 C-914 Guide Channel x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913 Floor Guide

(For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as CCL-75-410-W X [track length] 1DR KIT)

CCL-410-W KIT DETAILS (CC-410 HANGER, CC-408 TRACK, CC-470 FASCIA, C-914/C-913 GUIDE SYSTEM)

[★INDICATES MOUNTING FLANGE ON CC-408 TRACK]

[CC-470 SNAP-ON FASCIA ILLUSTRATED AS SOLID BLUE PROFILE]

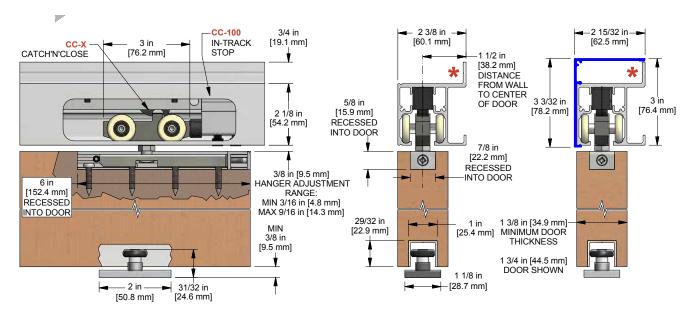

CONCEALED SIDE MOUNT DOOR SYSTEM EASY CONNECT CATCH'N'CLOSE HANGER




CCSF-493-W

Easy Connect Catch'N'Close Hanger

Key Product Features:

- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Easy installation with the quick disconnect hanger stud
- CC-493 Hanger Load Capacity 150 lbs. (two Hangers)
- CC-408 Extruded Aluminum Side Mount Track, 6061-T5 Alloy
- Includes:





HOW TO SPECIFY/ORDER CCSF-493-W FOR ONE DOOR OPENING



KIT CODE:

CCSF-1-493-W X [track length] 1DR KIT

Above kit includes:

1 - CC-408 Side Mount Track C.A. X [track length]


(typically two x door width, example: 36 in wide door requires a 72 in long track)

- 1 CC-480 Side Mount Fascia C.A. X [track length]
- 2 CC-482 End Caps C.A.
- 2 CC-493 Easy Connect Catch'N'Close Hangers
- 2 CC-1 Catch'N'Close Closing Devices (for doors weighing up to 150lbs)
- 2 CC-100 Catch'N'Close In-Track Stops
- 1 C-914 Guide Channel x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913 Floor Guide

(For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as CCSF-75-493-W X [track length] 1DR KIT)

CCSF-493-W KIT DETAILS (CC-493 HANGER, CC-408 TRACK, CC-480 FASCIA, C-914/C-913 GUIDE SYSTEM)

[★INDICATES MOUNTING FLANGE ON CC-408 TRACK] [CC-480 SNAP-ON FASCIA ILLUSTRATED AS SOLID **BLACK** PROFILE]

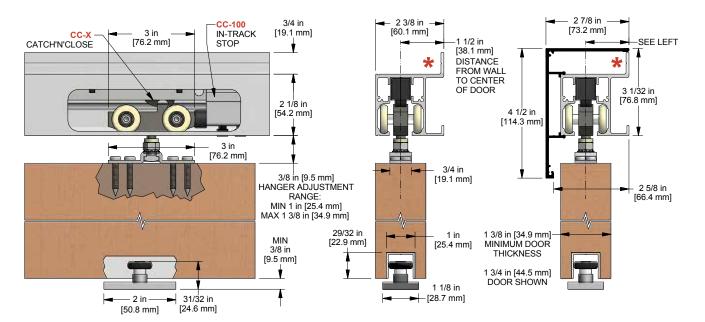

BY-PASSING DOOR SYSTEM ZERO CLEARANCE CATCH'N'CLOSE HANGER




CCD-410-W

Zero Clearance Catch'N'Close Hanger

Key Product Features:

- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Allows for a minimal clearance of 3/16 in [4.8 mm] between the top edge of the door and the underside of the track
- CC-410 Hanger Load Capacity 150 lbs. (two Hangers)
- CC-500 Extruded Aluminum Double Track, 6061-T5 Alloy
- Includes:





HOW TO SPECIFY/ORDER CCD-410-W FOR TWO DOOR OPENING



KIT CODE:


CCD-1-410-W X [track length] 2DR KIT

Above kit includes:

- 1 CC-500 Double Track X [track length] (typically two x door width, example: 36 in wide door requires a 72 in long track)
- 4 CC-410 Zero Clearance Catch'N'Close Hangers
- 4 CC-1 Catch'N'Close Closing Devices (for doors weighing up to 150lbs)
- 4 CC-100 Catch'N'Close In-Track Stops
- 2 C-914 Guide Channels x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913D-134 By-Pass Double Guide

(For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as CCD-75-410-W X [track length] 2DR KIT)

CCD-410-W KIT DETAILS (CC-410 HANGER, CC-500 TRACK, C-914/C-913D-134 GUIDE SYSTEM)

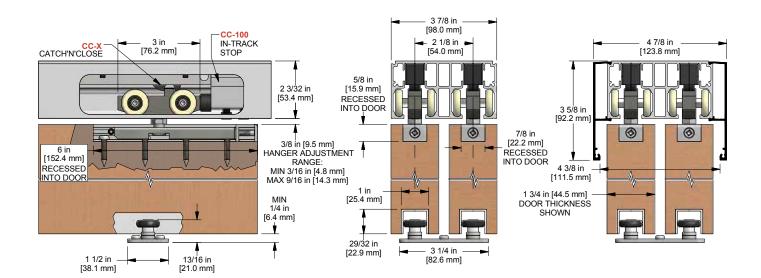

BY-PASSING DOOR SYSTEM EASY CONNECT CATCH'N'CLOSE HANGER




CCD-493-W

Easy Connect Catch'N'Close Hanger

Key Product Features:

- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- Easy installation with the quick disconnect hanger stud
- CC-493 Hanger Load Capacity 150 lbs. (two Hangers)
- CC-500 Extruded Aluminum Double Track, 6061-T5 Alloy
- Includes:





HOW TO SPECIFY/ORDER CCD-493-W FOR TWO DOOR OPENING



KIT CODE:


CCD-1-493-W X [track length] 2DR KIT

Above kit includes:

- 1 CC-500 Double Track X [track length] (typically two x door width, example: 36 in wide door requires a 72 in long track)
- 4 CC-493 Easy Connect Catch'N'Close Hangers
- 4 CC-1 Catch'N'Close Closing Devices (for doors weighing up to 150lbs)
- 4 CC-100 Catch'N'Close In-Track Stops
- 2 C-914 Guide Channels x [door width] (example: 36 in wide door requires a 36 in long guide channel)
- 1 C-913D-134 By-Pass Double Guide

(For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as CCD-75-493-W X [track length] 2DR KIT)

CCD-493-W KIT DETAILS (CC-493 HANGER, CC-500 TRACK, C-914/C-913D-134 GUIDE SYSTEM)

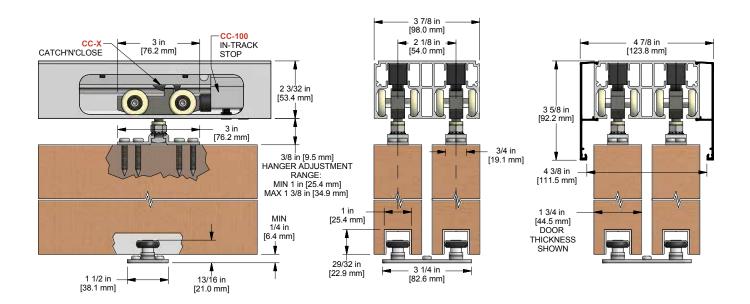

CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT

INTRODUCING THE TYPE CC SERIES


CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT

Catch'N'Close Crowderframe Pocket Door Kits are the answer where space is limited or where the swinging of a hinged door is undesirable or inconvenient. Enjoy the benefits of hiding the door in a wall for a clean and spacious look! It can be installed in single door or double bi-parting door applications.

Key Product Features:

- Complete with roll formed steel uprights for less deflection and easy to screw into for drywall fastening
- Provides easier and guicker installation than a traditional pocket built on site
- Integrating the revolutionary Catch'N'Close system prevents bouncing and slamming of the sliding doors and can be installed on both the opening and closing ends of the door
- For Standard 2X4 Wall Construction

HOW IT ALL COMES TOGETHER (TYPE CC-1W Catch'N'Close Crowderframe Pocket Door Kit Shown)

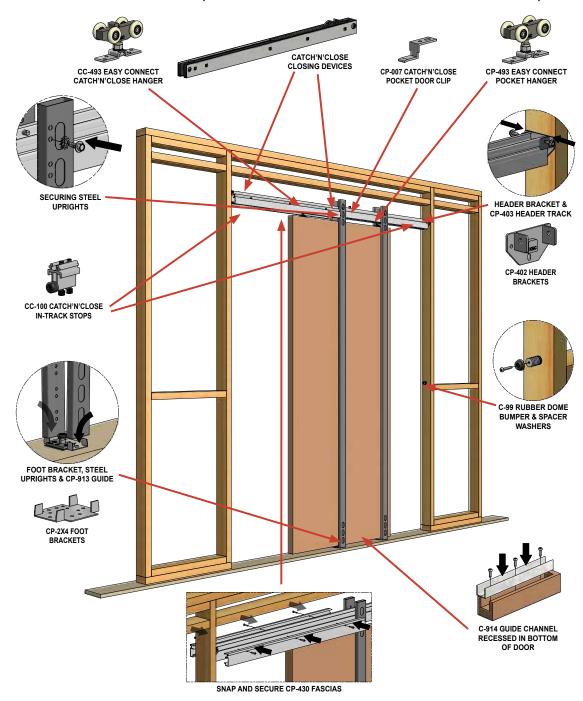

CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT



TYPE CC-W

CC-493 Easy Connect Catch'N'Close Hanger

Key Product Features:

- Complete with roll formed steel uprights for less deflection and easy to screw into for drywall fastening
- Provides easier and quicker installation than a traditional pocket built on site
- Integrating the revolutionary Catch'N'Close system prevents bouncing and slamming of the sliding doors and can be installed on both the opening and closing ends of the door
- For Standard 2X4 Wall Construction
- Nylon Wheels with Precision Ground Ball Bearings
- Proudly North American made
- CC-493 Easy Connect Catch'N'Close Hanger Load Capacity 150 lbs. (two Hangers)
- CP-403 Extruded Aluminum Header Track, 6061-T5 Alloy
- Includes:









HOW TO SPECIFY/ORDER TYPE CC-1W FOR ONE DOOR OPENING

KIT CODE:

TYPE CC-1W CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT

Suitable for one door from: 26 in [660 mm] to 36 in [914 mm] wide x 80 in [2032 mm] to 84 in [2134 mm] or 2150 mm high


For other door sizes or custom applications, please contact customer service.

For doors weighing 75lbs or less, please use the CC-75 Catch'N'Close Closing Device, specify/order as TYPE CC-75W


(All Catch'N'Close Crowderframe Pocket Door Kits above are complete with all hardware for one complete opening. Wood framing and door are by others. For locks and pulls please visit our website for more details)

HOW TO SPECIFY/ORDER ADD-ON PRODUCTS FOR ABOVE KITS

 For Double Bi-Parting Door applications, please review and specify CPD-CC-JOINER kit as an add-on in addition to two (2) single Catch'N'Close Crowderframe Pocket Door Kits as shown above based on door sizes.

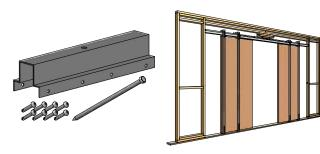


 For 2X6 Wall Construction applications, please review and specify CP-CC-2X6 SHIM kit as an add-on in addition to each single Catch'N'Close Crowderframe Pocket Door Kits as shown above based on door sizes. (Two (2) shim kits are required for double bi-parting door applications using the CPD-CC-JOINER Kit)




CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT

TYPE CC-W CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT DIMENSION DETAILS

(WITH C-914/CP-913 GUIDE SYSTEM)

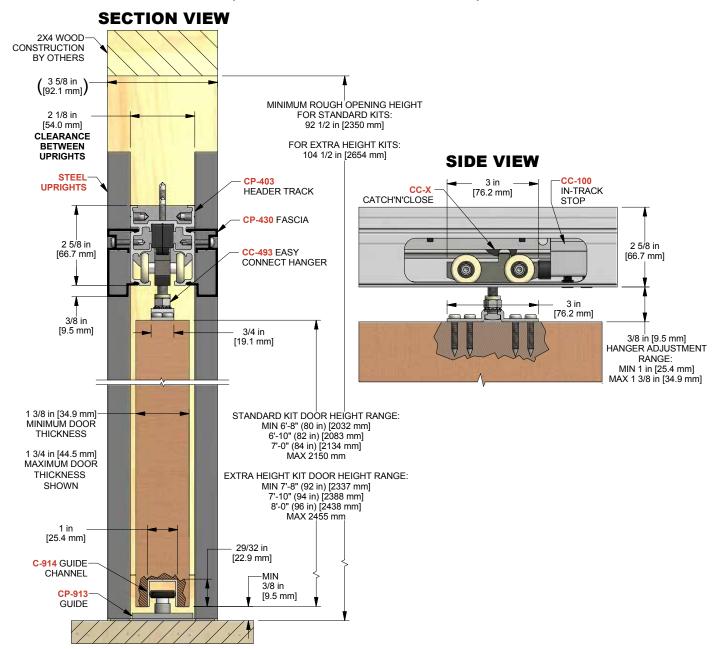

ELEVATION VIEW OF COMPLETE INSTALLATION (FOR DOORS 26 in [660 mm] TO 48 in [1219 mm] WIDE)

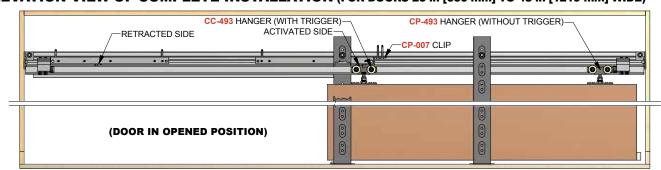

CROWDERFRAME POCKET TRIM KIT



CP-TK-2X4

Snap-on Aluminum Crowderframe Pocket Trim Kit




1 3/4 in [44.5 mm]


Crowderframe Pocket Trim Kit (CP-TK) saves on installation time, easy to install and allows for quick access by removing for pocket door maintenance versus traditional wood trim finishing.

Key Product Features:

- Installing the CP-TK Kit with the CP-CC493-W Catch'N'Close Crowderframe
 Pocket Door Kit will allow for the door to be installed after the drywall is installed.
 This is not possible with traditional pocket door kits (Note, it is recommended to
 install door for positioning and remove before drywall is installed if required.
- Using the snap-on Trim Kit allows for the trim to be installed without visible fasteners. Simply caulk if desired and paint to finish.
- Can be primed and painted on site
- Custom finishes can be supplied, please contact customer service
- Use with 1/2 in [12.7 mm] drywall only (by others)
- Use in standard 2X4 wall construction only (by others)
- Use with 1 3/4 in [44.5 mm] thick doors only (by others)
- Use with TYPE CC-W Catch'N'Close Crowderframe Pocket Door Kits only
- CP-TK-C2X4 Trim Clip is Extruded Aluminum, 6061-T5 Alloy
- CP-TK-TA2X4 Inside Trim Cover & CP-TK-TC2X4 Trim Cover Casing is Clear Anodized Extruded Aluminum, 6061-T5 Alloy
- CP-TK-TA2X4 Inside Trim Cover & C-917 Guide Channel are supplied complete with pile insert to help cut the sound and light transfer though the opening


TYPE CC-W CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT WITH CP-TK-2X4 POCKET TRIM KIT DIMENSION DETAILS



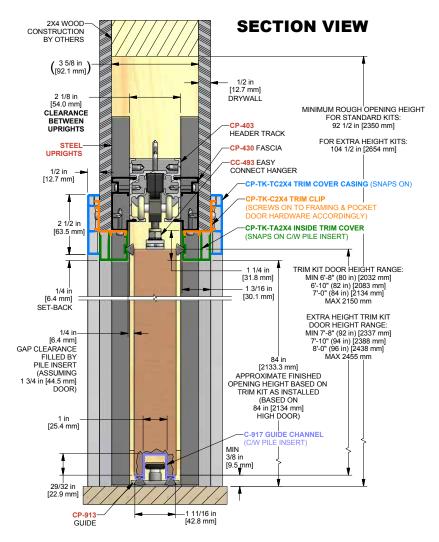

CROWDERFRAME POCKET TRIM KIT

HOW TO SPECIFY/ORDER CP-TK-2X4 CROWDERFRAME POCKET TRIM KITS

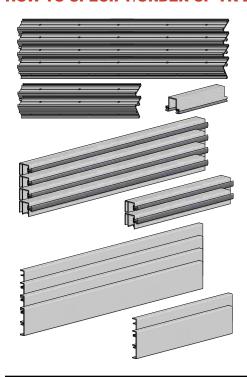

KIT CODE:

CP-TK-2X4 CROWDERFRAME POCKET TRIM KIT


For applications where a single TYPE CC-W CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT is used.

Suitable for one door KIT from: 18 in [457 mm] to 36 in [914 mm] wide x 80 in [2032 mm] to 84 in [2134 mm] or 2150 mm high.

FULL POCKET DOOR KIT is NOT included, must be purchased separately

For other door sizes or custom applications, please contact customer service.

TYPE CC-W CATCH'N'CLOSE CROWDERFRAME POCKET DOOR KIT WITH CP-TK-2X4 POCKET TRIM KIT DIMENSION DETAILS

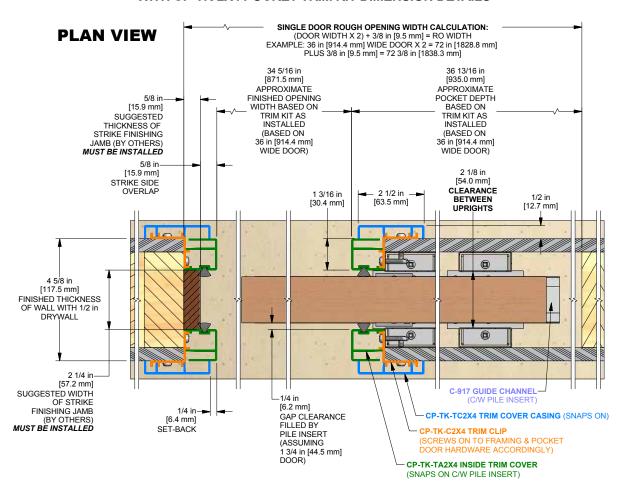



PRODUCTS MANUFACTURED BY:
K.N.CROWDER MFG. INC.

CROWDERTRACK QUALITY SLIDING DOOR HARDWARE

THRESHOLDS • STAIR NOSINGS • AUTOMATIC DOOR BOTTOMS • WEATHERSTRIP
ASTRAGALS • DOOR LITES • DOOR LOUVERS FOOT GRILLES & FLOOR MATS
K.N.CROWDER MFG. INC



V.1-010316

K.N.CROWDER MFG. INC. 1220 BURLOAK DRIVE, BURLINGTON, ONTARIO, CANADA L7L 6B3 FAX: 905-315-8090 TEL: 905-315-9788

K.N.CROWDER MFG. INC. 210 EIGHTH STREET SOUTH, LEWISTON, NEW YORK, U.S.A. 14092 TEL: 716-754-8247

TOLL-FREE TELEPHONE: 1-866-999-1KNC (1562) WEBSITE: www.kncrowder.com TOLL-FREE FAX: 1-800-567-0123 EMAIL: customerservice@kncrowder.com